

## 35W BENCH MOUNT

AC-HVDC POWER SUPPLIES

The HCP35 series power supplies are highly stable switch-mode power supplies with low ripple. Due to the high switching frequency the power supply has a low residual ripple in the generated output voltage with high stability, good regulation dynamics, and at the same time only a low amount of stored energy.

The HV output's polarity is positive or negative; a reverse polarity switch is optionally available. The power supplies can be operated in the local, analog (optional) and digital (optional) operating modes.



### Dimensions

See mechanical details table

### Features

- 0-3.5kV to 0-65kV output models
- Single phase AC input
- Continuous operation at full rated power
- Multi-function control panel with user friendly interface
- Digital, LAN and USB interface option
- Analog programming/interface option
- Manual voltage and current control with digital display
- Set-point display via a button
- Set-point adjustment possible with disabled output
- Push-button switch for output voltage
- Adjustable overvoltage limit
- Low ripple
- CE marked, EN61010-1 safety compliant
- Short circuit & arc protection
- 2 year warranty

### Benefits

- Provides maximum device control & flexibility.
- Safe operation ensures maximum protection to the power supply
- High voltage release included for safe operation at high voltage output
- User friendly controls combined with bespoke terminal software gives greater flexibility
- Lighter than the leading brand products & easier to maintain
- Low cost of ownership

### Applications

- Capacitor / Insulation testing
- Electrostatics
- Gas discharge / Plasma
- High voltage test stands
- Ion sources
- Laboratory power
- Nuclear fusion research
- Particle accelerators
- Photomultiplier / Secondary electron multiplier
- Sputtering

## Models & Ratings

Model Number	Polarity	Output Voltage	Output Current	Input Voltage	Frequency
HCP3.5P010	Positive	0 to +3.5kV	0 to 10mA	230VAC, ±10%	47 to 63Hz
HCP3.5N010	Negative	0 to -3.5kV			
HCP3.5R010	Reversible	0 to 3.5kV			
HCP6.5P005	Positive	0 to +6.5kV	0 to 5mA	230VAC, ±10%	47 to 63Hz
HCP6.5N005	Negative	0 to -6.5kV			
HCP6.5R005	Reversible	0 to 6.5kV			
HCP012P2.5	Positive	0 to +12.5kV	0 to 2.5mA	230VAC, ±10%	47 to 63Hz
HCP012N2.5	Negative	0 to -12.5kV			
HCP012R2.5	Reversible	0 to 12.5kV			
HCP020P1.5	Positive	0 to +20kV	0 to 1.5mA	230VAC, ±10%	47 to 63Hz
HCP020N1.5	Negative	0 to -20kV			
HCP020R1.5	Reversible	0 to 20kV			
HCP035P001	Positive	0 to +35kV	0 to 1mA	230VAC, ±10%	47 to 63Hz
HCP035N001	Negative	0 to -35kV			
HCP035R001	Reversible	0 to 35kV			
HCP065P0.5	Positive	0 to +65kV	0 to 0.5mA	230VAC, ±10%	47 to 63Hz
HCP065N0.5	Negative	0 to -65kV			
HCP065R0.5	Reversible	0 to 65kV			

## Options

- Coarse/fine-potentiometers (99%/1%) for more accurate adjustment of voltage and / or current
- Analog programming/interface
- Analog programming/interface, floating
- Computer interfaces -IEEE 488, RS 232, RS 422, RS485, Profi-bus DP, USB, LAN (more on request)
- Electronically controlled polarity reversal switch (up to 65kV remotely controllable when ordered with a programming or interface, for higher voltages, please contact us).
- Lower ripple:  $<1 \times 10^{-5} + 10\text{mVpp}$  (peak to peak)
- Higher stability: Stability, over 8 hours under constant conditions  $<\pm 1 \times 10^{-5}$   
Temperature coefficient  $<\pm 1 \times 10^{-5}/\text{K}$  within the specified temperature range
- Lower stored energy
- Power limitation
- Supply voltages other than that shown in the models & ratings table may be specified

Please consult XP Power Sales

## Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage					See models and ratings table
Efficiency		90		%	
Overvoltage Category		II			
Protection Class		I			
Input Connector	IEC60320 C20 receptacle				

## Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage Range	3.5		65	kV	See models and ratings table
Output Current Range	0.5		10	mA	See models and ratings table
Output Control	Continuous adjustment from 0 to rated voltage/current by front panel mounted potentiometers				
Output Polarity	See models and ratings table				
Output Isolation	"0V" terminal is connected to the PE (EARTH), Current return preferably takes place via the screen of the output cable				
HV Output Connection	Mating HV connector and 3m cable supplied				
Voltage Control	<1ms with load changes from 10% to 100% or 100% to 10%, respectively				
Voltage Setting Range	Using the VOLTAGE potentiometer, approx. 0.1% to 100% of the rated value				
Current Control	<10ms with load changes that effect a change of less than 10% in the output voltage				
Current Setting Range	Using the CURRENT potentiometer, approx. 0.1% to 100% of the rated value				
Setting Time at Rated Load	<100ms to 500ms, depending on type, for changes in the output voltage from 10% to 90% or 90 to 10%, respectively				
Set Point Resolution	$<\pm 1 \times 10^{-3}$ of rated value with potentiometer on front panel $<\pm 1 \times 10^{-5}$ of rated value with fine potentiometer $1 \times 10^{-4}$ of rated value with option interface				
Discharge Time Constant	With output free of load, max. 10s				
Accuracy	Voltage: $\pm 0.2\%$ of the nominal value Current: within the range of >5mA up to <200A: $\pm 0.2\%$ of the nominal value Outside the above mentioned range: $\pm 0.5\%$ of the nominal value Additional digital display error $\pm 2$ digits				
Residual Ripple	$<1 \times 10^{-4}$ pp +50mVpp (peak to peak), typ. $5 \times 10^{-5}$ pp of rated value (measuring band width 30Hz to 10MHz) $<3 \times 10^{-5}$ , typ. $<1.5 \times 10^{-5}$ of rated value RMS				
Control Deviation	$\pm 10\%$ mains voltage variation: $<\pm 1 \times 10^{-5}$ of the rated value Open circuit / full load: $2 \times 10^{-4}$ of the rated value Over 8 hours: $<\pm 1 \times 10^{-4}$ of the rated value Temperature deviations $<\pm 1.5 \times 10^{-4}$ /K of the rated value				
Short Circuit Protection	The power supply is short circuit and arc proof. The maximum current can be drawn at any output voltage, even in the event of a short circuit.				

## Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Temperature Operation	0		+40	°C	
Storage Temperature	-20		+50	°C	
Ambient Temperature	0		+40	°C	Operating
	0		+60	°C	Storage
Humidity	0		+80	%	Up to +31°C, decreasing linearly down to 50% RH at 40°C
Cooling	Heat generated in the power supply unit is dissipated by convection or, in the case of high-power units, by forced ventilation				
Operating Altitude			2000	m	Above sea level
Pollution Degree		1			
Protection	IP20				
Operation Location	Only for use in dry indoor areas				

## Signals & Controls

	Function
Front panel	Voltage and current potentiometer, power switch, HV ON/OFF switch, digital display for current and voltage, voltage limit potentiometer. Display of the output voltage and current set points is possible with the SETVALUES push-button.
Operating Modes	The HV output's polarity is positive, negative; or reversible (see models & ratings table). The power supplies can be operated in the LOCAL, ANALOG (optional) and DIGITAL (optional) operating modes.

## EMC: Emissions


Phenomenon	Standard	Notes & Conditions
Harmonic Currents	EN61000-6-2	
Voltage Flicker	EN61000-6-3	

## Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
EN	EN61010-1	
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Mechanical Details

Front view with controls

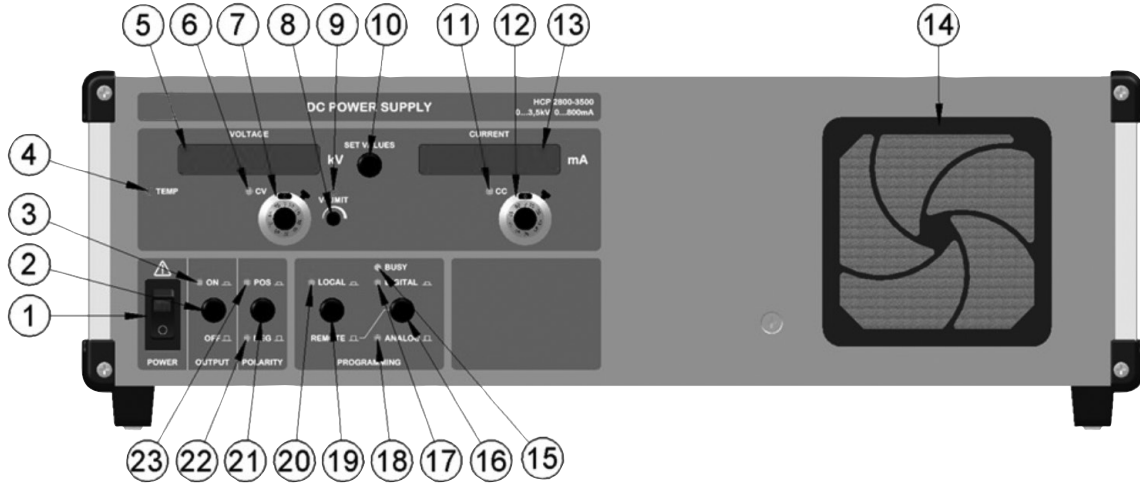

Front panel shown for illustrative purposes only, dimensions and layout differ by power rating - see mechanical details table.

Number	Function	Number	Function
1	AC power switch with indicator light Disconnects the power supply from the mains, two-pole switching	13	Current display, Flashing: Set point, continuous: Actual value
2	DC output ON (OUTPUT) There is no mains disconnection	14	Air inlet (depending on device type)
3	DC output ON LED Lights up green when the controller and therefore the power stage is operating (OUTPUT ON)	15	LED BUSY displays data traffic on the digital interface (Optional)
4	Over-temperature LED: Internal device temperature too high, fan failed or contaminated. (Use is type-dependent)	16	Switching the operation mode between REMOTE/ANALOG and REMOTE/DIGITAL (Optional)
5	Voltage display, flashing: Set point; not flashing: Actual value	17	LED indicating digital programming active (Optional)
6	LED for constant voltage control mode (Constant Voltage)	18	LED indicating Analog programming/interface active (Optional)
7	Lockable ten-turn potentiometer for voltage adjustment	19	Switching the operation mode setting between LOCAL and REMOTE (Optional)
8	Set-point limit adjustment for voltage V-LIMIT (can only be operated with a tool)	20	LED indicating local control mode active (Optional)
9	LED for active voltage set-point limit	21	Local output polarity adjustment (Optional) Without polarity reversal, polarity labelled using coloured stickers: RED: POSITIVE; BLUE: NEGATIVE
10	SET VALUES Switch displays between Set-point and Actual output mode, displays flash when in set-point mode.	22	LED set for negative output voltage (Optional reverse polarity switch)
11	LED for constant current control mode (Constant Current)	23	Optional reverse polarity switch) LED set for positive output voltage
12	Lockable ten-turn potentiometer for current adjustment		

Mechanical Details

Rear view with single phase AC input



Rear panel shown for illustrative purposes only, dimensions and layout differ by power rating - see mechanical details table.

Number	Function	Number	Function
1	AC input with mains fuses IEC connector (as shown) with integrated fuse	5	HV output (dedicated for screened HV- cable with grounded screen, which can be used for current return)
2	15-pin Sub-D connector for analog programming/interface (Optional)	6	0V load connection, internally connected to the 0V of the electronics. This 0V connection is permanently connected to the protective conductor (PE).
3	Slot for digital interface (e.g.: IEEE-488, RS232, USB, LAN, ...)] (Optional)	7	Earth bolt (is permanently connected to the protective conductor (PE): This connection must be connected to the ground of the load.
4	Air outlet (depending on device type)	8	Polarity indication: RED: POSITIVE, BLUE: NEGATIVE RED/BLUE: OPTIONAL POLARITY REVERSAL SWITCH

## Mechanical Details

Model Number	Mounting	Width		Height		Depth	Weight
HCP3.5P010	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP3.5N010	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP3.5R010	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP6.5P005	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP6.5N005	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP6.5R005	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP012P2.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	4kg
HCP012N2.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	5kg
HCP012R2.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	5kg
HCP020P1.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	5kg
HCP020N1.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	5kg
HCP020R1.5	Bench mount <sup>(1)</sup>	½ 19"	222mm	3U	133mm	350mm	5kg
HCP035P001	Bench mount <sup>(1)</sup>	19"	443mm	3U	133mm	450mm	10kg
HCP035N001	Bench mount <sup>(1)</sup>	19"	443mm	3U	133mm	450mm	10kg
HCP035R001	Bench mount <sup>(1)</sup>	19"	443mm	3U	133mm	450mm	10kg
HCP065P0.5	Bench mount <sup>(1)</sup>	19"	443mm	3U	133mm <sup>(2)</sup>	450mm <sup>(3)</sup>	22kg
HCP065N0.5	Bench mount <sup>(1)</sup>	19"	443mm	3U	133mm <sup>(2)</sup>	450mm <sup>(3)</sup>	22kg
HCP065R0.5	Bench mount <sup>(1)</sup>	19"	443mm	5U	221mm	550mm	45kg

### Notes:

1. Rack mount option
2. With polarity reversal switch these units will be 2U higher.
3. With polarity reversal switch these units will be 100mm deeper.

### Cables

#### Mains input cable

Single phase mains: with CEE-7/7

#### Mating connectors

For control inputs and outputs, connectors are not included (digital interface cables are commercially available).

#### Screened HV output cable

3m long with mating connector fitted one end only. Delivered short circuited for safety reasons.